

HS-NCM High-Speed Network Communications Modules

General

The High-Speed Network Communications Module (HS-NCM) provides NOTIFIER's NFS-320, NFS-640, NFS2-640, NFS-3030, and NFS2-3030 Fire Alarm Control Panels, NCA and NCA-2 Network Control Annunciators, and DVC Digital Voice Command with a means to connect to High-Speed NOTI•FIRE•NET™ (NFN). Six types of HS-NCM are available:

- **HS-NCM-MF** for connecting nodes with multi-mode fiber-optic cable
- **HS-NCM-SF** for connecting nodes with single-mode fiber-optic cable
- **HS-NCM-MFSF** for connecting multimode and single-mode fiber optic mediums on the same network.
- **HS-NCM-W-2** for connecting nodes with twisted-pair wire
- **HS-NCM-WMF-2** for connecting wire and multimode fiber-optic medium on the same network
- **HS-NCM-WSF-2** for connecting wire and single-mode fiber-optic mediums on the same network

Each HS-NCM can accommodate up to two node addresses. For example, one HS-NCM can provide network communication for both an NFS2-640 and an NCA-2.

When not connected to a fire alarm panel, the HS-NCM defaults to repeater mode and can be used to boost signal distances or to pass data transmissions between two differently configured network segments when wire and fiber co-exist on a network.

NOTE: Correct configuration is dependent on network design; refer to the High-Speed NFN Manual, P/N 54013.

For further information and diagrams, refer to the HS-NCM Manual, P/N 54014.


HS-NCM-W-2 Features

- Supports twisted-pair wire medium
- NFPA Style 4 (Class B) operation or NFPA Style 7 (Class A) operation
- Transformer coupling provides electrical isolation between nodes
- Pluggable terminal wiring with strain relief
- Pluggable service connector (feeds signal directly through) in the event that power must be removed from a node
- 12 Mb transmission rate
- Data is regenerated at each node
- Two network ports to allow simultaneous connection to fire alarm control panel and to programming computer
- Enables software and database upload/download over the High-Speed NFN
- Up to 3,000 feet (914.4 m) between nodes in a point-to-point fashion (actual distance varies with wire quality)


HS-NCM-W-2 Interconnections: When wiring consecutive HS-NCM-W-2 boards, wiring may enter or exit at Port A or Port B. HS-NCM-W-2 port-to-port wiring is polarity sensitive; use of Port A or Port B is not arbitrary. An HS-NCM-W-2 may be connected to any of the following devices:

- HS-NCM-W-2 (in another panel)
- HS-NCM-WMF-2
- HS-NCM-WSF-2

HS-NCM-W-2 Switch Functions: The HS-NCM-W provides one set of switches to simplify network setup. Enable ground fault detection

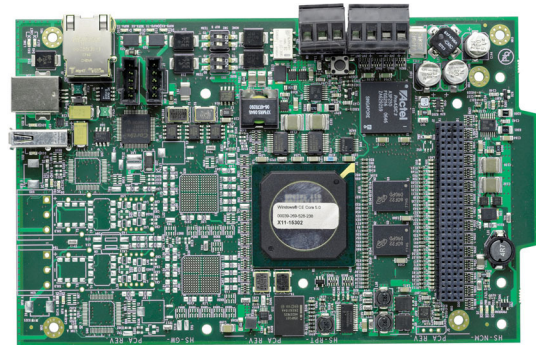

HS-NCM-MF, HS-NCM-SF, HS-NCM-MFSF

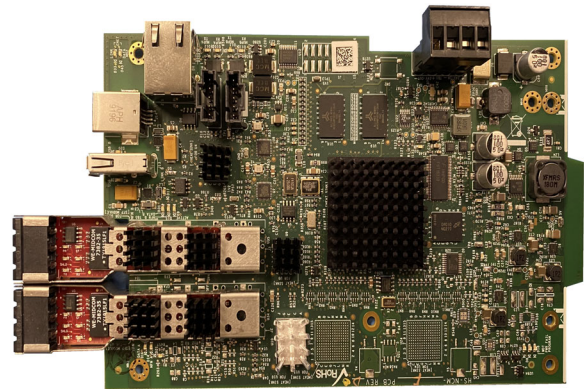

HS-NCM-W-2, HS-NCM-WMF-2, HS-NCM-WSF-2

by setting the "ON" switch SW4-1 (Channel A); switch SW4-2 (Channel B).

HS-NCM-MF and HS-NCM-SF Features

- Supports fiber-optic medium
- NFPA Style 4 (Class B) or Style 7 (Class A) operation
- Data is immune to all environmental noise
- Optical isolation prevents ground loops
- High-Speed NFN fiber-optic medium
- Fiber type: 62.5/125 micrometers (multi-mode); 50/125 micrometers (multimode), or 9/125 micrometers (single mode)
- Maximum attenuation: 10 dB with 62.5/125 μm cable, 6.5 dB with 50/125 μm cable, and 30 dB with 9/125 μm cable
- Wavelength (1): 1310 nanometers
- Connectors: LC style
- Baud transmission rate: 100 Mb
- Data is regenerated at each node
- Two network ports to allow simultaneous connection to fire alarm control panel and to programming computer
- Enables software and database upload/download over the High-Speed NFN

HS-NCM-MF/SF Interconnections: When wiring consecutive nodes/repeaters, fiber cable must exit one board on Transmit (TX) and enter the next node/repeater on Receive (RX). The fiber-optic pair (RX, TX) from Port A of one node/repeater connects to Port B of another node/repeater. A HS-NCM-MF/SF may be connected to any of the following devices:

- HS-NCM-MF/SF (respectively) on another panel

- HS-NCM-WMF-2
- HS-NCM-WSF-2
- HS-NCM-MFSF

HS-NCM-WMF-2, HS-NCM-WSF-2, and HSNCM-MFSF Features

- Supports twisted-pair wire and fiber-optic medium
- NFPA Style 4 (Class B) operation or NFPA Style 7 (Class A) operation
- Allows wire and fiber optic nodes to communicate as one network
- Fiber type: 62.5/125 micrometers (multi-mode); 50/125 micrometers (multimode), or 9/125 micrometers (single mode)
- Maximum attenuation is 10 dB with 62.5/125 μ m cable, and 6.5 dB with 50/125 μ m cable, and 30 dB with 9/125 μ m cable
- Wavelength (1): 1310 nanometers
- Pluggable service connector (feeds signal directly through) in the event that power must be removed from a node
- Data is regenerated at each node
- Two network ports to allow simultaneous connection to fire alarm control panel and to programming computer
- Enables software and database upload/download over the High-Speed NFN
- Up to 3,000 feet (914.4 m) between nodes in a point-to-point fashion (actual distance varies with wire quality)

HS-NCM-WMF-2/WSF-2/MFSF Interconnections: When wiring consecutive nodes/repeaters, fiber cable must exit one board on Transmit (TX) and enter the next node/repeater on Receive (RX). The fiber-optic pair (RX, TX) from Port A of one node/ repeater connects to Port B of another node/repeater. An HSNCM- WMF-2/WSF-2/MFSF may be connected to any of the following devices:

- HS-NCM-WMF-2
- HS-NCM-WSF-2
- HS-NCM-MFSF (on another panel)
- HS-NCM-MF
- HS-NCM-SF

Compatibility

The HS-NCM-W-2, HS-NCM-WMF-2, and HS-NCM-WSF-2 are compatible with the following which are obsolete and no longer sold:

- HS-NCM-W
- HS-NCM-WMF
- HS-NCM-WSF

Common Specifications

Temperature and humidity ranges: This system meets NFPA requirements for operation at 0°C to 49°C (32°F to 120°F); and at a relative humidity (non-condensing) of 85% at 30°C (86°F) per NFPA, and 93% \pm 2% at 32°C \pm 2°C (89.6°F \pm 1.1°F) per ULC. However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and all peripherals be installed in an environment with a nominal room temperature of 15°C to 27°C (60°F to 80°F).

Weight:

- HS-NCM-MFSF, HS-NCM-MF, HS-NCM-SF: 5.2 ounces (147.4 grams)
- HSNCM-W-2, HS-NCM-WMF-2, HS-NCM-WSF-2: 5.75 ounces (163 grams)

Power supply: 24 VDC @ 400 mA

Mounting: All models of the HS-NCM can be installed in any standard chassis such as the CHS-4L, CHS-M2, CHS-M3, CHS-4N or CPU2-640 chassis (see panel sheets). Additionally, the HS-NCM-W-2 can be door-mounted on the ADP-4B dress panel on a single-space blank plate (BMP-1) for mounting in an CAB-4 Series cabinet.

Agency Listings and Approvals

The following listings and approvals apply to the HS-NCM. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult Honeywell for the latest listing status.

- UL Listed: S635
- ULC Listed: S635
- CSFM: 7300-0028:0257, 7165-0028:0224
- FM Approved
- FDNY: Pending

Ordering Information

HS-NCM-MF: High-Speed Network Communications Module, fiber-optic cable interface (multi-mode)

HS-NCM-SF: High-Speed Network Communications Module, fiber-optic cable interface (single-mode)

HS-NCM-MFSF: High-Speed Network Communications Module, fiber-optic cable interface (multi-mode/single-mode)

HS-NCM-W-2: High-Speed Network Communications Module, twisted-pair wire interface

HS-NCM-WMF-2: High-Speed Network Communications Module, wire and fiber-optic cable interface (wire/multi-mode)

HS-NCM-WSF-2: High-Speed Network Communications Module, wire and fiber-optic cable interface (wire/single-mode)



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

NOTIFIER

12 Clintonville Road
Northford, CT 06472
203.484.7161
www.notifier.com

NOTIFIER® is a registered trademark and NOTIFIRE-NET™ is a trademark of Honeywell International Inc.
©2020 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

Country of Origin: USA

