

FW-MM(A) & FW-RM(A) SWIFT Wireless Modules

General

The SWIFT® wireless monitor module is intended for use with a wireless gateway to interface with a device having contacts used to signal status conditions. It is designed to provide an interface to contact devices such as security contacts, waterflow switches, or pull stations. The input to the monitor module is non-latching and does not require a reset. The device has a panel controlled LED indicator. The monitor module must be within 3-feet of the monitored device when using field wiring or 20 feet in non-metallic conduit. The SWIFT wireless relay module allows the control panel to switch contacts by code command. The relay contains an isolated set of Form-C contacts, which operate as a SPDT switch. Circuit connections to the relay are not supervised by the module. The SWIFT relay module can be used to activate functions such as a remote power supply (in conjunction with a monitor module), elevator recall, door holders and fan shutdown of wired devices or SWIFT devices within the same mesh network. The module also includes a panel-controlled LED indicator.

SWIFT wireless modules are intelligent (addressable) modules which provide secure, reliable communication to the Fire Alarm Control Panel (FACP) across a Class A mesh network. Wireless modules create an opportunity for applications where it is costly (concrete walls/ceilings, buried wires), obtrusive (surface mount conduit), or possibly dangerous (asbestos) to use traditional wired devices. In addition, both wired and wireless devices can be present on the same FACP providing an integrated wired-wireless solution for increased installation potential.


The mesh network within the SWIFT system creates a child-parent relationship between the devices so that each device has two parents providing a second path for communications on every device. If one device can no longer operate for any reason, the rest of the devices can still communicate with each other, directly or through one or more intermediate devices.

The SWIFT system also engages frequency hopping to prevent system interference whether intentional or accidental.

The devices communicate across the mesh network through a gateway to the FACP. The FACP views the SWIFT wireless device and another addressable device on the system providing similar detection functions and outputs as a wired counterpart. In addition, both wired and wireless devices can be present on the same FACP to meet the needs of a given application. A SWIFT wireless system can use any combination of modules, smoke and heat detectors, pull stations, and AV bases.

Features

- Wireless installation
- Class A mesh network
- Addressable code wheels
- Commercial applications
- UL 268 listed
- ULC S527 listed
- Frequency hopping
- Bi-directional communications

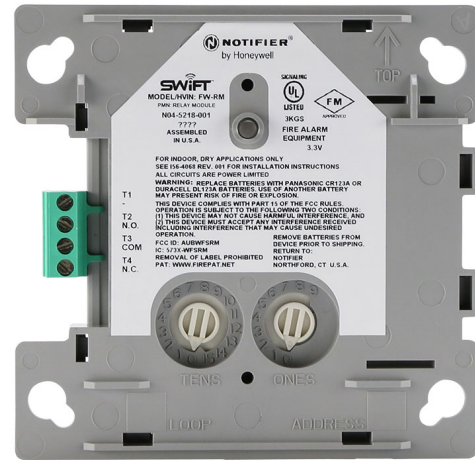

FW-RM Wireless Relay Module

Compatible Control Panels

NOTE: Refer to panel documentation for UL/ULC compatibility.

- N16 INSPIRE™ Series (*UL applications*)
- NFS2-3030
- NFS2-640
- NFS-320/C
- NFS-320SYS/C
- NFW-100X (*UL applications*)
- NFW-50X (*UL applications*)

Components and Ordering Information

- **FW-MM(A):** FlashScan wireless monitor module. Used to monitor devices with mechanical contact actuation. Includes a special cover with a built-in tamper magnet. Recommended for installation in a SMB500-WH box (ordered separately) rather than a metal backbox for best performance. Requires (4) CR-123A batteries (included).
- **FW-RM(A):** Wireless relay module. Includes a special cover with a built-in tamper magnet. Recommended for installation in a SMB500-WH box (ordered separately) rather than a metal backbox for best performance. Requires (4) CR-123A batteries (included).
- **FWSG(A):** FlashScan Wireless SWIFT Gateway - 1 SWIFT Gateway is required for each wireless mesh, and supports up to 49 SWIFT detectors or modules. Connects to the SLC loop of a compatible panel using FlashScan protocol. Power may be supplied by the SLC circuit or via an optional 24VDC input. See *DN-60820* for other components available for use with the SWIFT Gateway.

NOTE: Use of the 24VDC input may be more convenient for service as it allows for powering down a gateway without shutting down an SLC loop.
- **SMB500-WH:** Optional surface-mount backbox.

Monitor Module Specifications

PHYSICAL / OPERATING SPECIFICATIONS

Dimensions: Height 4.5" (11.43 cm); Width 4.5" (11.43 cm); Depth 1.5" (3.81 cm)

Device Weight (includes 4 batteries): 7.9 oz (224 g)

Operating Temperature Range: 32°F to 120°F (0°C to 49°C)

Operating Humidity Range: 10% to 93% non-condensing

ELECTRICAL SPECIFICATIONS

EOL Resistance: 3.9K Ohms

Maximum IDC Wiring Resistance: 10 Ohms

Maximum IDC Voltage: 3.2 Volts

Maximum Average IDC Current: 5.51A

Maximum Transmit RF Power: 17 dBm

Radio Frequency Range: 902-928 MHz

BATTERY SPECIFICATIONS

Battery Type: 4 Panasonic CR123A or 4 Duracell DL 123A

Battery Life: 2 years

Battery Replacement: Upon BATTERY LOW or BAT LOW display and/or during annual maintenance

Relay Module Specifications

PHYSICAL / OPERATING SPECIFICATIONS

Dimensions: Height 4.5" (11.43 cm); Width 4.5" (11.43 cm); Depth 1.5" (3.81 cm)

Operating Temperature Range: 32°F to 120°F (0°C to 49°C)

Operating Humidity Range: 10% to 93% non-condensing

ELECTRICAL SPECIFICATIONS

Maximum Transmit RF Power: 17 dBm

Radio Frequency Range: 902-928 MHz

BATTERY SPECIFICATIONS

Battery Type: 4 Panasonic® CR123A or 4 Duracell® DL 123A

Battery Life: 2 years

Battery Replacement: Upon BATTERY LOW or BAT LOW display and/or during annual maintenance

Relay Contact Ratings

Current Rating	Maximum Voltage	Load Description	Application
2 A	25 VAC	PF = 0.35	Non-coded
3 A	30 VDC	Resistive	Non-coded
2 A	30 VDC	Resistive	Coded
0.46 A	30 VDC	(L/R = 20ms)	Non-coded
0.7 A	70.7 VAC	PF = 0.35	Non-coded
0.9 A	125 VDC	Resistive	Non-coded
0.5 A	125 VAC	PF = 0.75	Non-coded
0.3 A	125 VAC	PF = 0.35	Non-coded

Agency Listings and Approvals

The file number(s) below reference the specific listings for the equipment in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL/ULC Listed:** S635
- **CSFM (Monitor Module):** 7300-0028:0273 ; (Relay module): 7300-0028:0277
- **FM Approved**
- **FCC ID:** (Monitor Module) AUBWFSSMM and (Relay Module) AUBWFSSRM
- **IC ID:** (Monitor Module) 573X-WFSMM and (Relay Module) 573X-WFSRM

Each device complies with part 15 of the FCC rules meaning operation is subject to two conditions: 1) The device may not cause harmful interference and 2) The device must accept any interference received including interference that may cause undesired operation.

Standards and Codes

The SWIFT Wireless Modules comply with the following UL Standards and with NFPA 72 Fire Alarm System requirements.

- UL 864
- UL 268
- ULC S527



This document is not intended to be used for installation purposes.
 We try to keep our product information up-to-date and accurate.
 We cannot cover all specific applications or anticipate all requirements.
 All specifications are subject to change without notice.

Acclimate® Plus, FlashScan®, NOTIFIER®, ONYX®, System Sensor®, and SWIFT® are registered trademarks of Honeywell International Inc. Microsoft® and Windows® are registered trademarks of Microsoft Corporation. Duracell® is a registered trademark of Duracell U.S. Operations Inc. Panasonic® is a registered trademark of Panasonic Corporation.

©2022 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited

Country of Origin: Mexico/China

NOTIFIER

12 Clintonville Road
 Northford, CT 06472
 203.484.7161
 www.notifier.com

