


IDP-RELAY-6

Addressable Relay Module

The IDP-RELAY-6 is an addressable relay module for use with Honeywell Farenhyt Series fire alarm control panels (FACPs). The IDP-Relay-6 has six Form C relays. It allows a Farenhyt FACP to switch discrete contacts by code command. If needed, you can disable a maximum of three unused modules on the IDP-RELAY-6 board. No supervision is provided for the notification appliance circuit.

The IDP-RELAY-6 contacts can be used for virtually any normally open or normally closed application. Each IDP-RELAY-6 is programmed with a unique signaling line circuit (SLC) loop address. When an event occurs that controls the IDP-RELAY-6, the relay is triggered by the FACP.

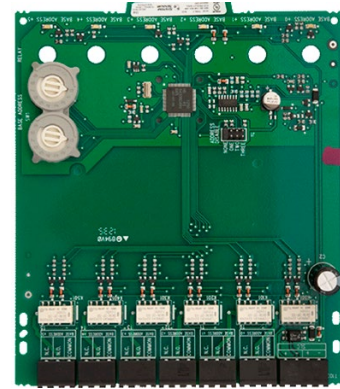

IDP-RELAY-6

Installation

The IDP-RELAY-6 mounts in the Honeywell IDP-ACB cabinet (PN IDP-ACB). The IDP-ACB has a built-in chassis that will accommodate one or two IDP-RELAY-6 modules.

COMPATIBILITY

The IDP-RELAY-6 is compatible with the following Farenhyt Series FACPs:

- IFP-2100 / IFP-2100ECS / RFP-2100
- IFP-2000 / IFP-2000ECS / RPS-2000
- IFP-1000 / IFP-1000ECS
- IFP-300 / IFP-300ECS
- IFP-100 / IFP-100ECS
- IFP-75
- IFP-50

FEATURES & BENEFITS

- Six Form C contacts
- Removable 12 to 18AWG plug-in terminal blocks
- Relay programming is completely flexible—can be mapped to zone conditions
- Individual LED for each relay contact
- Two module mounting in the IDP-ACB cabinet
- Up to three unused modules can be disabled
- Rotary address switches for fast installation
- Mounting hardware included
- Class A or B operation
- UL Listed
- CSFM Listed
- MEA Listed 386-02-E Vol. II

IDP-RELAY-6 Technical Specifications

SPECIFICATIONS*

Physical: 6.8" H x 5.8"W x 1.25" D

Shipping Weight: 6.3oz (196g)

ELECTRICAL RATINGS

Operating Voltage: 15 to 32VDC

Standby Current: 1.45mA maximum

Alarm Current: 30 mA/Relay Pulse (15.6 mS pulse duration) pulse under panel control

Relay Contact Ratings:

2.0A @ 25VAC (PF=.35), non-coded

3.0A @ 30VDC resistive, non-coded

2.0A @ 30VDC resistive, coded

0.46A @ 30VDC (L/R=20ms), non-coded

0.7A @ 70.7VAC (PF=.35), non-coded

0.9A @ 125VDC resistive, non-coded

0.5A @ 125VAC (PF=.75), non-coded

0.3A @ 125VAC (PF=.35), non-coded

ENVIRONMENTAL

Operating Temperature: 32°-120°F (0°C – 49°C)

Humidity: 10 to 85% non-condensing)

ORDERING INFORMATION

IDP-RELAY-6: Six Relay Module

ACCESSORIES

IDP-ACB: Cabinet. 15.25" H x 12.5" W x 3"D

For a complete listing of all compliance approvals and certifications, please visit www.farenhyt.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Honeywell® and System Sensor® are registered trademarks of and Farenhyt™ is a trademark of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, Please call 800-446-6444.

For more information

Learn more about Honeywell's Farenhyt Series and other products available by visiting www.farenhyt.com

Honeywell Security & Fire

12 Clintonville Road
Northford, CT 06472
800-328-0103

Doc 350291| Rev G | 12/17
© 2017 Honeywell International Inc.

Honeywell