Main Control Card (EN version 4.xx or BS version 3/3+) - Compatibility Information

GENT by Honeywell

Current products				Past Products							
8 line display				16 line display							
1 Vigilon BS 2 34K BS Control Panel Without Zone, Delay and Sounder LEDs	3 Vigilon BS 4 Vigilon EN 5 34K BS Network Node BS / EN Without Zone LEDs	6 Vigilon EN + Zn LEDs Post Feb 05 Control Panel With Zone LEDs	7 Vigilon EN + Zn LEDs Pre Feb 05 Control Panel With Zone LEDs	8 Vigilon BS 9 Vigilon EN 10 34K BS Control Panel BS / EN	11 Vigilon BS 12 Vigilon EN 13 34K BS Network Node BS / EN	14 32K or 15 Senator 2 16 3300 Mk 2 Control Panel	17 32K 18 Senator 2 Network Interface	19 3408 Control panel	20 3404 21 3300 Mk 1 Control panel	22 3505 Terminal Node	Main Control Card Part number 2211-xxx
		6 Vig EN-Zn Post Feb 05 **2211-143**	7 Vig EN-Zn Pre Feb 05 **2211-147**	9 Vig EN **2211-155**							**VIG-MCC-UPGR** (EN ver. 4)
	4 Vig EN **2211-152**				12 Vig EN **2211-176**						**VIG-MCC-EN-NOD-UPG** (EN ver. 4)
	3 Vig BS **2211-153** 5 34K BS **2211-171**				11 Vig BS **2211-168** 13 34K BS **2211-170**						**VIG-MCC-BS-NOD-UPG** (BS ver. 3 / 3+)
2 34K BS **2211-151**				10 34K BS **2211-169**							**34K-MCC-UPGR** (BS ver. 3 / 3+)
1 Vig BS **2211-144**				8 Vig BS **2211-150**							**VIG-MCC-V3+** (BS ver. 3 / 3+)
						16 3300 Mark 2 To be advised 14 32K/Senator 2 15 **2211-166**		19 3408 **2211-164**	20 3404 / 3300 Mk 1 21 **2211-164**		**VIG-MCC-3400** (BS ver. 3 / 3+)
			RAM Card may be fitted #				17 32K/Senator 2 18 **2211-165**			22 3505 **2211-165**	**VIG-MCC-3500-NODE** (BS ver. 3 / 3+)

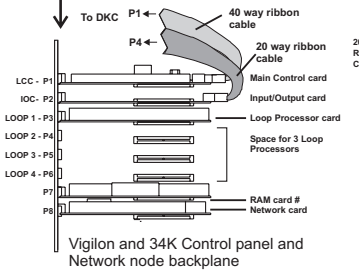

Vigilon and 34K Control panel and Network node backplane



3300 Mk 2, 32K and Senator 2 Control panel backplane



32K and Senator 2 - Network Interface backplane

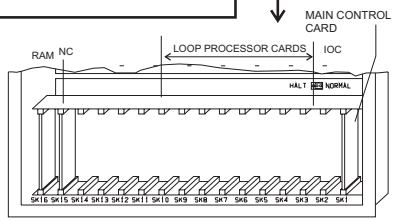

3408 Control panel backplane

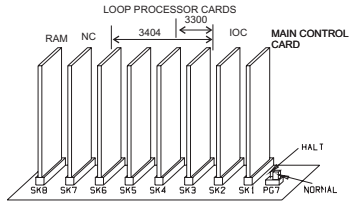

3404 & 3300 Mk1 Control panel backplane

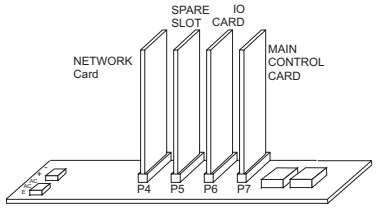

3505 Terminal node backplane

 # A RAM Card is only fitted on Vigilon panel having 16 line display and where the backplane has no flash.

14 15 and 16 are future options.